





P330*i* and P330*m* Card Printers

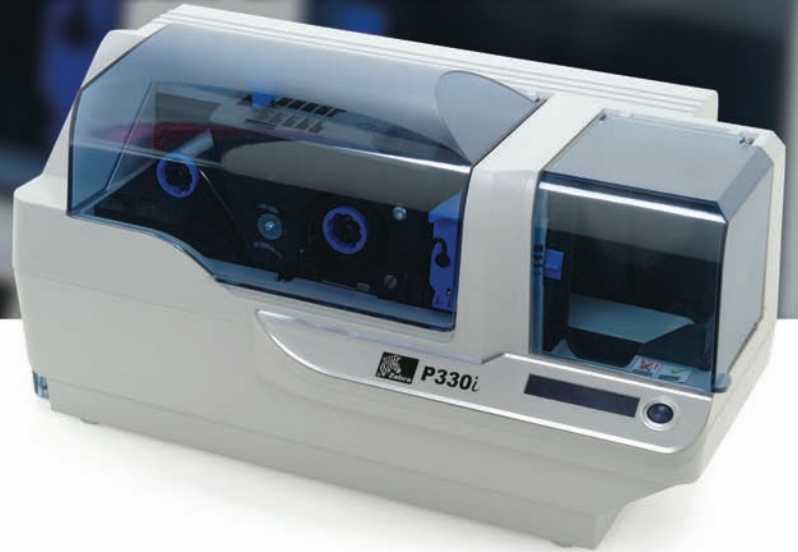

The Most Reliable & Expandable Card Printer in its Class

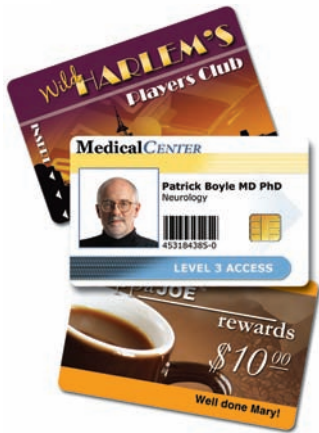

The Zebra P330i is the latest generation of Zebra's most popular card printer, with tens of thousands of printers installed worldwide. Designed and built for demanding environments, the P330i delivers reliability and performance for high-volume card production. Expansion options for networking and card encoding give the P330i the flexibility to meet your specific requirements. Affordable and easy to use, the Zebra P330i is the new leader in performance card printers. For monochrome-only printing applications and personalization, choose the P330m for a lower cost alternative.

Ideal for:

- » Employee ID cards
- » Student and faculty ID cards
- » Access control cards
- » Membership and loyalty cards
- » Personalized gift cards
- » Visitor ID cards
- » Government Licenses

Innovative and Easy-to-Use

- » Easy plug and play USB or USB with Ethernet interface simplifies configuration
- » Printhead bracket opens wide for easy ribbon access
- » 16 character LCD screen for printer status and error reporting messages
- » Translucent card cover allows you to see when supplies are running low and blank cards can be added while printing

Reliable and Flexible

- » Revolutionary angled card feeder design means fewer rejected cards*
- » Self-aligning printhead design for consistently uniform print quality

Encoding and Network Connectivity Expansion Options

- » 3 track magnetic stripe encoding (HiCo/LoCo)
- » Contact and contactless smart card encoding capabilities
- » Built-in 10/100 Ethernet for printer networking eliminates the need for third party external device, and includes networked printer management
- » UHF Gen 2 RFID (ISO-18000-6C) encoder (P330i)

High Performance

- » Vibrant, true-to-life colors
- » High volume card throughput
- » Large capacity card feeder available

i Series™ Functionality

- » Automatic color optimization and driver configuration (P330i)
- » Enhanced ribbon formulation for optimal color output (P330i)
- » Ribbon image counter and ribbon low notification (P330i)

*Patent pending

P330*m* Card Printer

Offering monochrome-only card printing, the P330m is the most cost effective solution for your personalization and monochrome printing applications.



P330i / P330m



Card Printer Product Specifications

General Specifications

- » 16-character LCD display
- » Windows® XP, 2000, Server 2003 and Vista compatible
- » Bi-directional driver communication
- » Two year printer warranty
- » Two year (unlimited passes) original printhead warranty

Printing

- » Color dye sublimation or monochrome thermal transfer printing
- » 144 cards per hour full color single-sided (YMCKO) (P330i)*
- » 5.2 seconds/card (P330m)*
- » 300 dpi (11.8 dots/mm) print resolution

* Based on average print coverage per card.

Bar Codes

- » Code 39, Code 128 B & C with & without check digit
- » 2 of 5 & 2 of 5 Interleaved
- » UPC-A, EAN 8 & EAN 13
- » PDF-417 2D bar code and other symbologies can be printed via Windows drivers

Card Specifications

- » Types: PVC, PVC Composite, Adhesive backed, UHF Gen 2 RFID
- » Card width/length: ISO CR-80-ISO 7810, 2.12" (54mm) x 3.38" (86mm)
- » Magnetic Stripe-ISO 7811
- » Smart Card contact and contactless
- » Card thickness: 10 mil (.25mm) to 60 mil (1.524mm) (+/- 10%)
- » Card feeder capacity: 100 cards (30 mil) or 220 cards (30 mil)
- » Card output hopper capacity: 100 cards (30 mil)

Communications Interface

- » USB 1.1 (USB 2.0 compatible) cable included
- » Optional Built-in 10/100 Mbps Ethernet

Electrical

- » 100 ~ 240 Volts AC, 50 ~ 60 Hz (auto switching)
- » 4 MB image memory standard
- » FCC Class A, CE, UL, CUL, and CCC approved
- » UHF: FCC 47 CFR Ch.1 Part 15
 - Industrie Canada RSS-21 0
 - ETSI EN 302 208
 - ETSI EN 300 220



Ribbon Specifications

- » i Series™ Printers require the use of i Series ribbons for full color printing (P330i)
- » YMCKO: 200 & 330 cards/roll (P330i)
- » 1/2 Panel YMC Full KO: 450 cards/roll (P330i)
- » KdO and KrO: 500 cards / roll (P330i)
- » Overlay varnishes: Clear and Hologram: 350 cards/roll
- » Monochrome: 1500 (Black) & 1000 cards/roll
- » Monochrome colors: black, red, blue, green, silver, gold, white and scratch-off grey
- » For optimum printer performance use Genuine Zebra Supplies



Mechanical

- » Width: 18.2 in (462 mm)
- » Depth: 9.4 in (239 mm)
- » Height: 10.1 in (256 mm)
- » Weight: 15.5 lbs (7.0 kg)

Environmental

- » Operating Temperature: 60°F to 86°F (15°C to 30°C)
- » Operating Humidity: 20% to 65% non-condensing
- » Storage Temperature: 23°F to 158°F (-5°C to 70°C)
- » Storage Humidity: 20% to 70% non-condensing
- » Ventilation: Free air

Options

- » Built-in 10/100 Mbps Ethernet
- » Smart card contact-ISO 7816 encoder (30 mil cards only)
- » Smart card MIFARE®/DESFire® encoder (30 mil cards only)
- » Smart card contact station (30 mil cards only)
- » Magnetic encoder (30 mil cards only) 3 track HiCo/LoCo (Reverse magnetic encoder available)
- » High capacity feeder (220 cards)
- » EPCglobal UHF Gen 2 RFID (ISO-18000-6C) with Anti-Collision, DRM, and advanced anti-jamming (P330i). Frequency: Hop table with up to 62 entries, accommodating the following regions:
 - FCC (NA) 902-928 MHz (USA, Canada)
 - ETSI (EU) 865.6-867.6 MHz, 869.85 MHz (Austria, Belgium, Denmark, Finland, France, Germany, Greece, Iceland, Ireland, Italy, Netherlands, Norway, Portugal, Spain, Sweden, Switzerland, UK)
- » Cleaning supplies

Genuine Zebra Supplies

- » Your choice of card printer supplies is critical. It is a primary factor affecting the reliability and consistency of printing. Genuine Zebra Supplies meet stringent quality standards and are tested for optimum performance with Zebra card printers.



Zebra Technologies Corporation



An ISO 9001 registered company ©2006 ZIH Corp. Specifications listed are for base model printers with standard features only unless otherwise noted. Specifications subject to change without notice. All product and brand names are trademarks of their respective companies. All rights reserved. All Copyrights, Trade and Service Marks shown or depicted herein are registered by their owners. No infringement is made for or implied by the use thereof.

Part No. P330i/P330m - 06/08

North America
Zebra Technologies Corporation
Card Printer Solutions
1001 Flynn Road
Camarillo, CA 93012-8706
USA
Telephone: +1 805 579 1800
Fax: +1 805 579 1808
Toll free in US: 800 452 4056
e-mail: cards@zebra.com

www.zebracard.com

Europe, Middle East, Africa
Zebra Technologies Corporation
Card Printer Solutions
The Valley Centre, Gordon Road
High Wycombe
Buckinghamshire HP13 6EQ, UK
Telephone: +44 870 241 1527
Fax: +44 870 241 0765
e-mail: eurosales@zebra.com

Asia Pacific
Zebra Technologies Corporation
Card Printer Solutions
120 Robinson Road
#06-01 Parakou Building
Singapore 068913
Telephone: +65 6858 0722
Fax: +65 6885 0836
e-mail: asiasales@zebra.com

Latin America
Zebra Technologies Corporation
Card Printer Solutions
9800 NW 41st Street, Suite 220
Doral, FL 33178
USA
Telephone: +1 305 558 3100
Fax: +1 305 558 8485
e-mail: latinsales@zebra.com